


# CmStick/B



Article-No:

1 0 0 1 - 0 3 - 5 6 0

## Description

The CmStick/B represents the heart of the CodeMeter Digital Rights Management system in a USB device form factor with a very small and noble case. It contains a smart card chip with a secure memory of about 328 kByte available for storing thousands of licenses. The basic idea of the revolutionary CodeMeter concept is that licenses can be stored for many products at the same time, with full multi-vendor capabilities.

The minimum set of License Options includes: Text (description of an entry), Unit Counter (number of runs or actually run time of a license), Activation Time (time the license is valid from), Expiration Time (time the license is valid until), Usage Period (starts at first time), Maintenance Period (according to release date), Feature Map (up to 32 modules or versions), License Quantity (concurrent use / floating network licenses), Protected Data / Extended Protected Data (128x256 bytes read-only data), Hidden Data (128x256 bytes only readable with password; usable as secret/private key), Secret Data (128x256 bytes non-readable, only usable as secret/private key), User Data (256 bytes, unsecured), Customer Owned License Information (256 bytes).

Encryption algorithms used in firmware 4.10 with serial number 3-3440000 or higher: 128 and 256-bit AES, SHA-256, 1024, 2048 and 4096-bit RSA, 224-bit ECC.

The integrated smart card chip fulfills the evaluation level EAL 5+ (Common Criteria certified) and contains a random number generator.

## Technical Specifications

The CodeMeter technology is covered by US 7.145.297 and other patents.

- Interface: USB 3.1 A-type connector, Hi-Speed USB 2.0 certified, USB 1.1 compatible, Mass Storage Communication (MSC) or Human Interface Device (HID), HID default
- CodeMeter License memory:
  - Data retention: 10 years at room temperature
  - Data endurance:
    - Unit Counter: up to 500 million decrements
    - Other license parameter: up to 10 million updates to each license
- Power supply: 5 V bus-powered, < 20 mA
- Temperature: 0° C ... + 70° C, non-condensing
- MTBF (Mean Time Between Failures): > 3 Million hours
- Case/Dimensions: Noble metal case, 12.1mm x 22mm x 4.5mm
- Weight: 3.1 g
- Warranty: 36 months

## Certificates

The CmStick/B is tested and qualified with the following standards:

### CE-Conformity | European Certificates

CmStick/B is fully compliant with all applicable European regulations.

- 2014/30/EU EMC: Report Bureau Veritas File CE180718D10, 2018-08-15
- EN55022:2010/AC:2016, IEC/CISPR 32:2015, class B
- EN55024:2010+A1:2015, IEC/CISPR 24:2010+AMD1:2015
- EN55032:2015, AS/NZS IEC/CISPR 32:2015
- All CmStick/B units are fully compliant with EU Directives 2011/65/EU (RoHS), 2015/863/EU (RoHS amendment), SJ/T 11363-2014 (China RoHS2), 2012/19/EU (WEEE), 1907/2006/EC (REACH), 207/2011/EU (PFOS -REACH Annex XVII), 1272/2013/EU (PAH-REACH Annex XVII), and 1272/2013/EU (DINP-REACH Annex XVII).

### International Certificates

- 47 CFR FCC, Part 15, Subpart B (2017), class B: Report Bureau Veritas File FD180718D10
- VCCI Class B ITE: Acceptance No. 2018048608, 2018-09-19
- KCC (South Korea): R-R-XWK-CmStick, 2018-08-08
- BSMI (Taiwan): D43250 RoHS,
- ACMA (RCM): RCM20180091804-C, 2018-09-19

### Other Certificates

- VDE License No. 129382
- C-UL-US listed I.T.E. Accessory 10 WB, E-File 211202, 2018-07-30

The encryption device is only for use with UL Listed PCs (low power system). Meets UL 60950-1 and CSA C22.2 No. 60950-1 Safety of Information Technology Equipment specifications.

### Ordering Information

P/N 1001-03-560: CmStick/B

Individual cases or laser engraving on request.

RoHS compliant

WEEE-Reg-No:

DE 90465365




WIBU-SYSTEMS AG  
 Rueppurrer Strasse 52-54  
 D-76137 Karlsruhe  
 Tel: +49-721-93172-0  
 Fax: +49-721-93172-22  
 info@wibu.com  
 www.wibu.com

# Technical Drawing

Article-No:

1 0 0 1 - 0 3 - 5 6 0

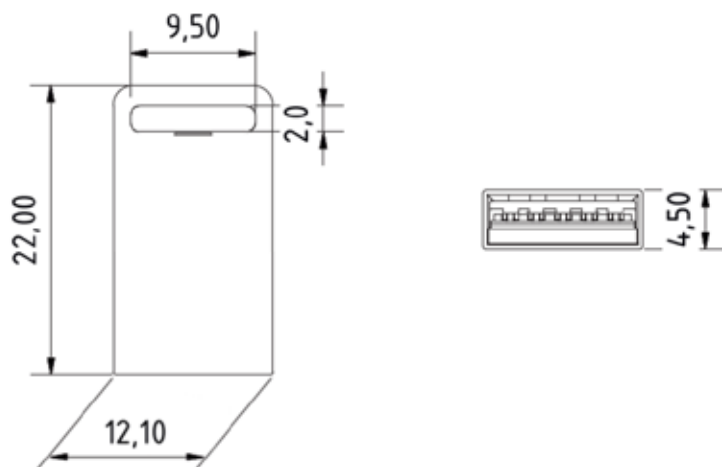

All dimensions in millimeter. Subject to change without notice.

WIBU-SYSTEMS AG  
Rueppurrer Strasse 52-54  
D-76137 Karlsruhe  
Tel: +49-721-93172-0  
Fax: +49-721-93172-22  
info@wibu.com  
www.wibu.com