

PRELIMINARY

CmStick/MI, / MC



Description

The CmStick/MI, /MC is the heart of the CodeMeter Digital Rights Management system as USB device in a very small, noble and rugged metal case. It contains a SmartCard chip including a secure memory of about 384 kbyte available for storing thousands of licenses plus additional different sizes of flash memory which can be used as a removable drive. The basic idea of the revolutionary CodeMeter concept is that licenses can be stored for many products even from many different vendors at the same time.

License Options are: Text (description of an entry), Unit Counter (i.e. number of runs or actually run time of a license), Activation Time (the license is valid from), Expiration Time (the license is valid until), Usage Period (starts at first use), Maintenance Period (according to release date), Feature Map (up to 32 modules or versions), License Quantity (concurrent use / floating network licenses), Protected Data / Extended Protected Data (128x256 bytes read-only data), Hidden Data (128x256 bytes only readable with password; usable as secret/private key), Secret Data (128x256 bytes non-readable, only usable as secret/private key), User Data (unsecured 256 bytes), Customer Owned License Information (256 bytes).

Used algorithms: 128 bit AES, SHA-256, 2048 bit RSA, 224 bit ECC.

The used SmartCard chip contains a random number generator according to FIPS140-1 and fulfills EAL 4+ (Common Criteria certified). The CmStick/MI, /MC has a green and a red LED.

Technical Specifications

The CodeMeter technology is covered by US 7.145.297 and other patents.

- **Interface: Hi-Speed USB 2.0**
- **CodeMeter License memory:**
 - Data retention: 10 years at room temperature
 - Data endurance:
 - Unit counter: up to 1.5 billion decrements
 - Other licence parameter: up to 500.000 updates to each license
- **CmStick/MI (industrial) SLC-Flash memory version:**
 - Data retention: 10 years at room temperature
 - Data endurance:
 - 100.000 write cycles guaranteed (typ. 1 million)
 - Performance: up to 18 MByte/s write, 22 Mbyte/s read
 - Extended temperature range on request
- **CmStick/MC (commercial) MLC-Flash memory version:**
 - Data retention: > 1year at 2,5TBW@85°C (TeraByteWritten)
 - Data retention: > 3year at 250GBW@85°C (GigaByteWritten)
 - Performance: up to 28 MByte/s write, 38 Mbyte/s read

- **Power supply: 5 V bus-powered, < 100 mA**
- **Temperature: 0 °C ... + 70 °C, non-condensing**
- **MTBF (Mean Time Between Failures): > 3 Million hours**
- **Case/Dimensions: Noble metal case, 8 mm x 16 mm x 61,5 mm (without cap 56 mm)**
- **Cap/Dimensions: 7 mm x 16 mm x 18 mm**
- **Weight: CmStick 24 g (without cap 19 g)**
- **Warranty: 36 months**

Certificates

The CmStick/MI /MC is tested and qualified with the following standards:

■ CE-Conformity | European Certificates

CmStick/MI, /MC is fully compliant with all applicable European regulations. Detailed test reports will follow soon.

■ International Certificates

Will follow soon

■ Other Certificates

VDE License No. 129382

C-UL-US listed I.T.E. Accessory 10 WB, E-File 211202

The encryption device is only for use with UL Listed PCs (low power system). Meets UL 60950-1 and CSA C22.2 No. 60950-1 Safety of Information Technology Equipment.

All CmStick/M are fully compliant according to EC Directives 2002/95/EC (RoHS) and 2002/96/EC (WEEE).

Ordering Information

P/N 1011-02-234: CmStick/MI 1GB SLC-Flash bulk

P/N 1011-02-235: CmStick/MI 2GB SLC-Flash bulk

P/N 1011-02-236: CmStick/MI 4GB SLC-Flash bulk

P/N 1011-02-237: CmStick/MI 8GB SLC-Flash bulk

P/N 1011-02-431: CmStick/MC 8GB MLC-Flash bulk

P/N 1011-02-432: CmStick/MC 16GB MLC-Flash bulk

P/N 1011-02-433: CmStick/MC 32GB MLC-Flash bulk

P/N 1011-02-434: CmStick/MC 64GB MLC-Flash bulk

P/N 1011-02-435: CmStick/MC 128GB MLC-Flash bulk
Memory variants, individual cases or laser engraving on request.




방송통신위원회



RoHS compliant
WEEE-Reg-No:
DE 90465365

All dimensions in millimeter.
Subject to change without
notice.

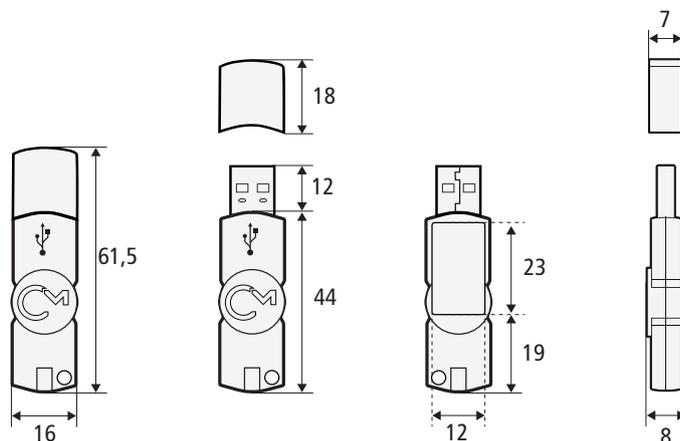

WIBU-SYSTEMS AG
Rueppurrer Strasse 52-54
D-76137 Karlsruhe
Tel: +49-721-93172-0
Fax: +49-721-93172-22
info@wibu.com
www.wibu.com

WIBU
SYSTEMS